

INVISION P MPD 150 | 36W

Product Reference

Environment Indoor

Installation Ceiling Suspended

Construction & Materials

Housing Aluminium Extrusion

Primary Lens -



Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Opal PC, Microprismatic

Antiglare Baffle -

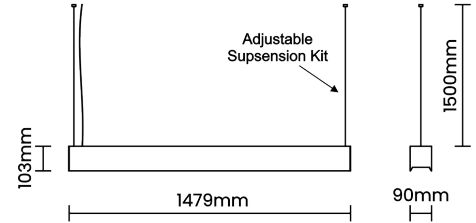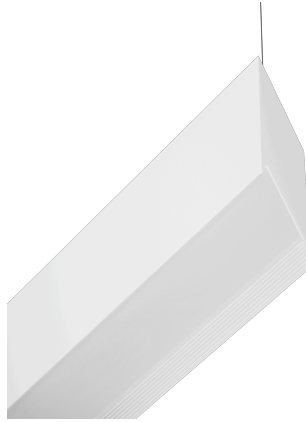

Thermal Management

Heat Sink Material Extruded Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 31.0

System Power Watts 35.6

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80/90

Led Type SMD mid power

LED Fitted Mid power LED array

Controls

Standard Switchable On/Off

Optional DDIM

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	INVISION P MPD 150	36W	WW27K	CRI80/90	94°	SWH	

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
INVISION P MPD 150	36W	3367	103	2700K	CRI80/90	94°	White	
		3774	106	3000K			Black	
		3987	112	4000K			Custom	
		4058	114	5700K				
INVISION P MPD 150	36W			WW27K	CRI80/90	94°	SWH	