

iFlex Grazer | 25W/MTR

Product Reference

Environment Outdoor

Installation Ceiling Surface, Floor Surface, Wall Surface

Construction & Materials

Housing -

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material -

Cooling Technique Passive Cooling

Optical System

Beam Direction -

Tilt -

Swivel -

Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz -

Control Gear -


Mounting Remote

LED Power Watts 25W/Mtr


System Power Watts -

Operating Voltage Vin -

Power Factor p.f. -

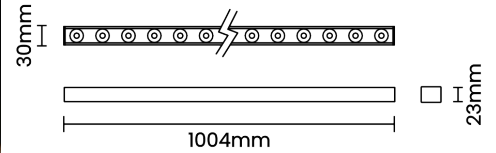

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type SMD high power

LED Fitted -

Controls

Standard Switchable On/Off

Optional DDIM, BTTM, CASAMBI

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	iFlex Grazer	25W/MTR		CRI80	25°x50°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
iFlex Grazer	25W/MTR	2000	80	3000K	CRI80	25°x50°	White SWH	Non Dimmable On/Off
					CRI90			Dali Dimmable DDIM
								Bluetooth Dimmable BTTM
								Casambi CBTM
iFlex Grazer	25W/MTR				CRI80	25°x50°	SWH	On/Off