

Track Rail 4C 1M, 2M | -

Product Reference

Environment Indoor

Installation Ceiling Surface

Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material -

Cooling Technique -

Optical System

Beam Direction -

Tilt -

Swivel -

Electrical System

Driven with -

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear -


Mounting -

LED Power Watts -

System Power Watts -

Operating Voltage Vin -

Power Factor p.f. -

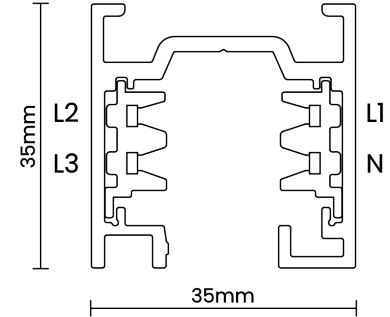

Light Distribution

LED Technology

Binning -

LED Life Time @ L80/B10 -

Colour Rendering (CRI) -

Led Type -

LED Fitted -

Controls

Standard Switchable -

Optional -

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|----------------------|------|-----|-----|-------|--------|---------|
| | Track Rail 4C 1M, 2M | - | | | | SWH | |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|----------------------|------|-------|----------|-----|-----|-------|------------------|---------|
| Track Rail 4C 1M, 2M | - | | | | | | White SWH | |
| | | | | | | | Black SBL | |
| Track Rail 4C 1M, 2M | - | | | | | | SWH | |