

Enso Custom | 20W

Product Reference

Environment Indoor

Installation Ceiling Suspended

Construction & Materials

Housing Aluminium Extrusion

Primary Lens -

Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser PMMA Frosted

Antiglare Baffle -

Thermal Management

Heat Sink Material Sheet Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 17.2W

System Power Watts 19.8W

Operating Voltage Vin 220-240V



Power Factor p.f. 0.95

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Enso Custom	20W	NW40K	CRI80	99	SWH	DDIM

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Enso Custom	20W	1703	86	4000K	NW40K	CRI80	99	White	SWH	Dali Dimmable	DDIM
								Black	SBL		
								Custom	CSM		
Enso Custom	20W				NW40K	CRI80	99	SWH			DDIM

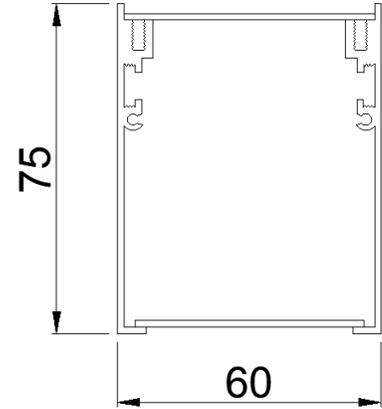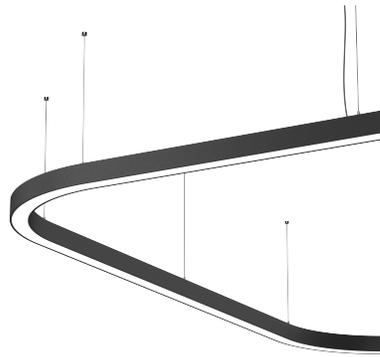

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80

Led Type SMD

LED Fitted Samsung Mid power LED array 32V-36Vdc/500mA

Controls

Standard Switchable On/Off

Optional DDIM,BTTM,CASAMBI,Non Dimmable