

Linescape 2315 100 | 15W

Product Reference

Environment Indoor
 Installation Ceiling Recess

Construction & Materials

Housing Aluminium
 Primary Lens -
 Primary Reflector -
 Secondary Reflector -
 Body Finish Anodised Aluminium
 Diffuser Opal PC
 Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium
 Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed
 Tilt No
 Swivel No

Electrical System


Driven with Constant Voltage Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Remote
 LED Power Watts 14.4
 System Power Watts -
 Operating Voltage Vin 220V- 240V/50-60Hz
 Power Factor p.f. >0.95

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Linescape 2315 100	15W	WW27K	CRI90	110°	AL	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Linescape 2315 100	15W	720	50	2700K WW27K	CRI90	110°	Anodised Aluminium AL	Non Dimmable On/Off
		749	52	3000K WW30K				Dali Dimmable DDIM
		792	55	4000K NW40K				
		821	57	5700K CW57K				
Linescape 2315 100	15W			WW27K	CRI90	110°	AL	On/Off

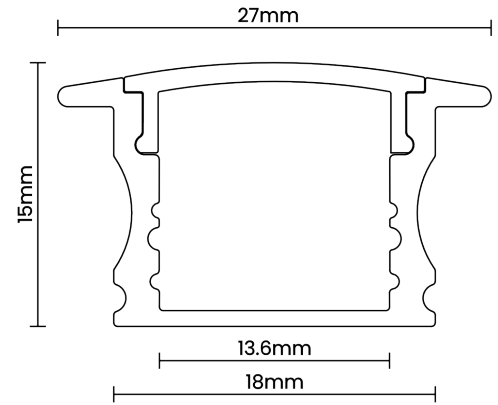

Light Distribution

LED Technology

Binning 3 Step MacAdam
 LED Life Time @ L80/B10 >50000 hours
 Colour Rendering (CRI) CRI90
 Led Type SMD mid power
 LED Fitted SMD mid power

Controls

Standard Switchable On/Off
 Optional DDIM