

Linescape 1715 | 14W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish Anodised Aluminium

Diffuser Opal PC

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote

LED Power Watts 13.4

System Power Watts -

Operating Voltage Vin 220V- 240V/50-60Hz



Power Factor p.f. >0.95

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Linescape 1715	14W	WW27K	CRI80	110°	AL	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL		
Linescape 1715	14W	670	50	2700K	WW27K	CRI80	Anodised Aluminium	AL	Non Dimmable	On/Off
		697	52	3000K	WW30K				Dali Dimmable	DDIM
		737	55	4000K	NW40K					
		764	57	5700K	CW57K					
Linescape 1715	14W			WW27K	CRI80	110°	AL	On/Off		

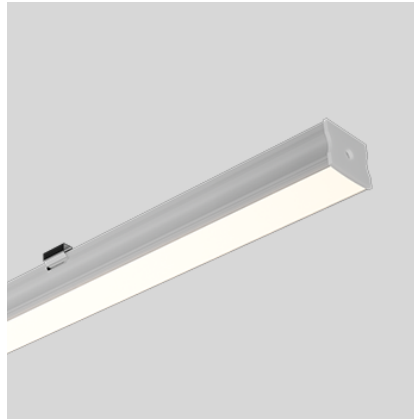

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80

Led Type SMD mid power

LED Fitted SMD mid power

Controls

Standard Switchable On/Off

Optional DDIM