


# LightLine 240 | 40W

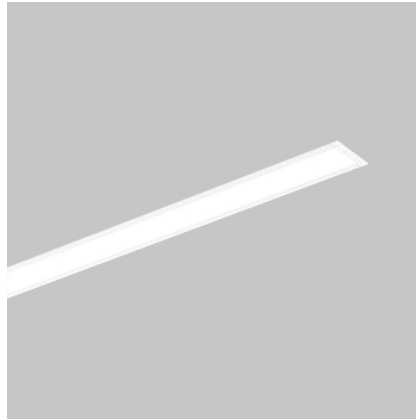

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White

Diffuser Premium high-transmission opal

Antiglare Baffle -

## Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote


LED Power Watts 32.9W

System Power Watts 37.8W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-38Vdc/1000mA

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	LightLine 240	40W	WW27K	CRI80	90°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
LightLine 240	40W	2873	76	2700K	WW27K	CRI80	90°	White	SWH	Non Dimmable	On/Off
		2948	78	3000K	WW30K	CRI90				Phase Dimmable	PDIM
		3137	83	4000K	NW40K					Dali Dimmable	DDIM
		3213	85	5700K	CW57K					Casambi	CBTM
				2700K-5700K	TW						
LightLine 240	40W			WW27K	CRI80	90°	SWH		On/Off		