

iNline R 240 | 60W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Extruded Aluminium
Primary Lens PMMA
Primary Reflector -
Secondary Reflector -
Body Finish White,Black,Custom
Diffuser Premium high-transmission opal
Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction General Diffuse
Tilt No
Swivel No

Electrical System



Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Integral
LED Power Watts 47.7W
System Power Watts 54.8W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|---------------------|------------|--------------|--------------|-------------|------------|---------------|
| | iNline R 240 | 60W | WW27K | CRI80 | 103° | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|---------------------|------------|-------|----------|--------------|--------------|-------------|-------------------|----------------------------|
| iNline R 240 | 60W | 5974 | 109 | WW27K | CRI80 | 103° | White SWH | Non Dimmable On/Off |
| | | 6138 | 112 | | | | Black SBL | Dali Dimmable DDIM |
| | | 6522 | 119 | | | | Custom CSM | Casambi CBTM |
| | | 6740 | 123 | | | | | |
| iNline R 240 | 60W | | | WW27K | CRI80 | 103° | SWH | On/Off |

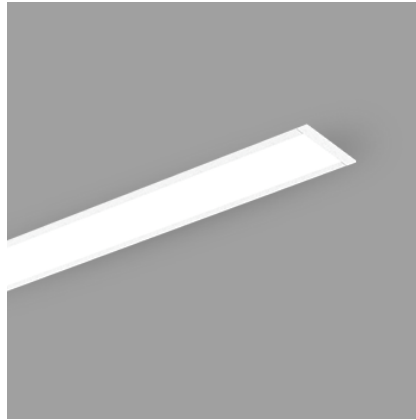

Light Distribution



LED Technology

Binning 3 Step MacAdam
LED Life Time @ L80/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type SMD mid power
LED Fitted Samsung Mid power LED array 32V-38Vdc/1400mA

Controls

Standard Switchable On/Off
Optional DDIM,CASAMBI,Non Dimmable