

# iNline S 60 | 20W

## Product Reference

Environment Indoor

Installation Ceiling Surface

## Construction & Materials

Housing Extruded Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Premium high-transmission opal

Antiglare Baffle -

## Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 17.0W


System Power Watts 19.55W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

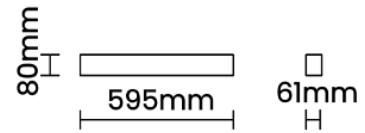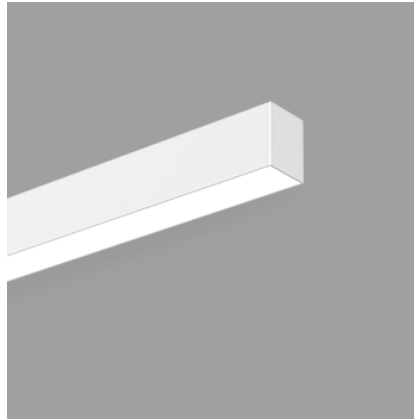

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-38Vdc/500mA

## Controls

Standard Switchable On/Off

Optional DDIM,CASAMBI,Non Dimmable

## Ordering Details

| Code Example: | Name               | Watt       | CCT          | CRI          | Angle       | Finish     | Control       |
|---------------|--------------------|------------|--------------|--------------|-------------|------------|---------------|
|               | <b>iNline S 60</b> | <b>20W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>103°</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME               | WATT       | LUMEN | EFFICACY | CCT          | CRI          | ANGLE       | FINISH     | CONTROL  |
|--------------------|------------|-------|----------|--------------|--------------|-------------|------------|--|
| <b>iNline S 60</b> | <b>20W</b> | 1975  | 101      | 2700K        | <b>WW27K</b> | <b>103°</b> | White      | Non Dimmable <b>On/Off</b><br>Dali Dimmable <b>DDIM</b><br>Casambi <b>CBTM</b> |
|                    |            | 2033  | 104      | 3000K        | <b>WW30K</b> |             | Black      |  |
|                    |            | 2151  | 110      | 4000K        | <b>NW40K</b> |             | Custom     |  |
|                    |            | 2229  | 114      | 5700K        | <b>CW57K</b> |             | CSM        |  |
|                    |            |       |          | 2700K-5700K  | <b>TW</b>    |             |            |  |
| <b>iNline S 60</b> | <b>20W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>103°</b> | <b>SWH</b> | <b>On/Off</b>  |