

Roa S OPD 120 | 28W

Product Reference

Environment Indoor

Installation Ceiling Surface

Construction & Materials

Housing Extruded Aluminium

Primary Lens PMMA



Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Premium high-transmission opal

Antiglare Baffle -

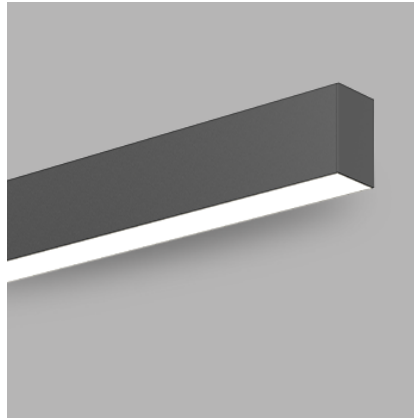

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling


Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

Light Distribution



Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 23.5W

System Power Watts 27.0W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-36Vdc/700mA

Controls

Standard Switchable On/Off

Optional DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Roa S OPD 120	28W	WW27K	CRI80	100°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL		
Roa S OPD 120	28W	2808	104	2700K	WW27K	100°	White	SWH	Non Dimmable	On/Off
		2889	107	3000K	WW30K		Black	SBL	Dali Dimmable	DDIM
		3024	112	4000K	NW40K		Custom	CSM	Casambi	CBTM
		3078	114	5700K	CW57K					
				2700K-5700K	TW					
Roa S OPD 120	28W			WW27K	CRI80	100°	SWH	On/Off		

