

Peeping Tom SR | 5W

Product Reference

Environment Indoor

Installation Semi Recess

Construction & Materials

Housing Die Cast Aluminium, Milled Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 3.7W


System Power Watts 4.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.5

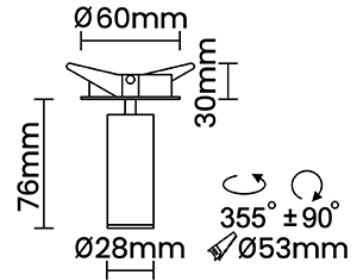

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted CREE COB LED 9Vdc/350mA

Controls

Standard Switchable On/Off

Optional PDIM, DDIM, CASAMBI, Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Peeping Tom SR	5W	WW27K	CRI80	32°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL			
Peeping Tom SR	5W	361	86	2700K	WW27K	CRI80	32°(MD)	White	SWH	Non Dimmable	On/Off
		382	91	3000K	WW30K	CRI90		Black	SBL	Phase Dimmable	PDIM
		403	96	4000K	NW40K			Custom	CSM	Dali Dimmable	DDIM
		416	99	5700K	CW57K					Casambi	CBTM
Peeping Tom SR	5W			WW27K	CRI80	32°(MD)	SWH	On/Off			