

Tiny Wash V2 | 5W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Aluminium
Primary Lens PMMA
Primary Reflector -
Secondary Reflector -
Body Finish White,Black,Custom
Diffuser -
Antiglare Baffle -

Thermal Management


Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System


Beam Direction Fixed Asymmetric
Tilt No
Swivel No

Electrical System

Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Remote
LED Power Watts 3.6W
System Power Watts 4.5W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.5

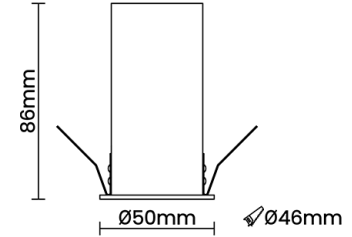

Light Distribution



LED Technology

Binning 3 Step MacAdam
LED Life Time @ L80/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 9Vdc/350mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Tiny Wash V2	5W	WW27K	CRI80		SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL		
Tiny Wash V2	5W	392	87	2700K	WW27K	CRI80	White	SWH	Non Dimmable	On/Off
		405	90	3000K	WW30K		Black	SBL	Phase Dimmable	PDIM
		423	94	4000K	NW40K		Custom	CSM	Dali Dimmable	DDIM
		432	96	5700K	CW57K				Casambi	CBTM
Tiny Wash V2	5W			WW27K	CRI80		SWH	On/Off		