

Go Pro 50 TT | 24W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium
Primary Lens PMMA
Primary Reflector -
Secondary Reflector Anodised
Body Finish White,Black
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed
Tilt No
Swivel No

Electrical System


Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Remote
LED Power Watts 20.2W
System Power Watts 23.2W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 50 TT	24W	WW27K	CR180	24°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Go Pro 50 TT	24W	2204	95	2700K	WW27K	CR180	White SWH	Non Dimmable On/Off	
		2274	98	3000K	WW30K	CR190	Black SBL	Phase Dimmable PDIM	
		2390	103	4000K	NW40K			Dali Dimmable DDIM	
		2436	105	5700K	CW57K			Bluetooth Dimmable BTM	
					2700K-5700K	TW			Casambi CBTM
					Warm to Dim	W2D			
Go Pro 50 TT	24W			WW27K	CR180	24°(SS)	SWH	On/Off	

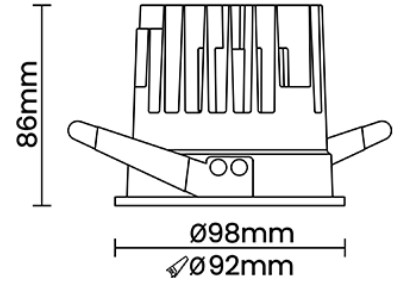

Light Distribution

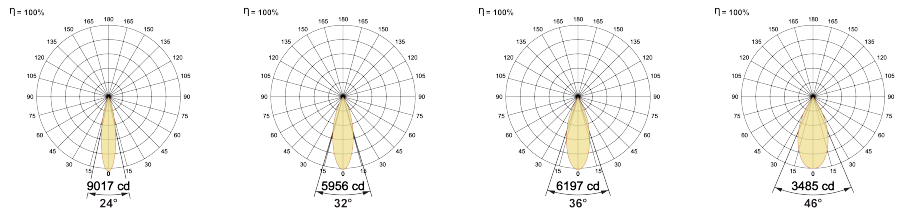

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L80/B10 >50000 hours
Colour Rendering (CRI) CR180,CR190
Led Type COB
LED Fitted CREE COB LED 36Vdc/600mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,BTDM,CASAMBI,Non Dimmable