

Go Pro 50 PF | 24W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 20.2W


System Power Watts 23.2W

Operating Voltage V_{in} 220-240 Vac

Power Factor p.f. > 0.95

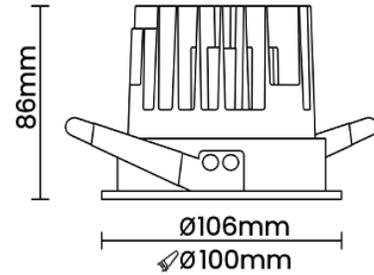

Light Distribution

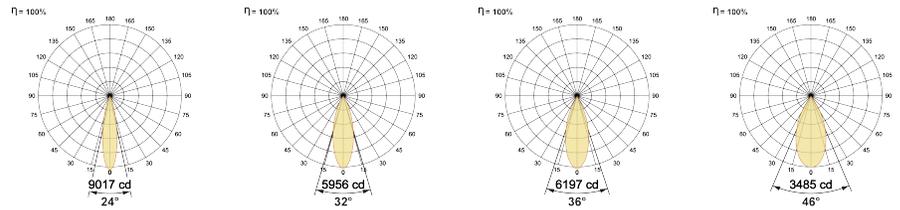

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/600mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 50 PF	24W	WW27K	CRI80	24°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL		
Go Pro 50 PF	24W	2204	95	2700K	WW27K	CRI80	24°(SS)	White SWH	Non Dimmable On/Off	
		2274	98	3000K	WW30K	CRI90	32°(MD)	Black SBL	Phase Dimmable PDIM	
		2390	103	4000K	NW40K		36°(WD)		Dali Dimmable DDIM	
		2436	105	5700K	CW57K		46°(VWD)		Bluetooth Dimmable BTTM	
					2700K-5700K	TW				Casambi CBTM
					Warm to Dim	W2D				
Go Pro 50 PF	24W			WW27K	CRI80	24°(SS)	SWH	On/Off		