

# Go Pro 50 TL | 24W

## Product Reference

Environment Indoor  
Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium  
Primary Lens PMMA  
Primary Reflector -  
Secondary Reflector Anodised  
Body Finish White,Black  
Diffuser -  
Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium  
Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed  
Tilt No  
Swivel No

## Electrical System


Driven with Constant Current Driver  
Input Voltage/Hz 220V- 240V/50-60Hz  
Control Gear Included  
Mounting Remote  
LED Power Watts 20.2W  
System Power Watts 23.2W  
Operating Voltage  $V_{in}$  220-240 Vac  
Power Factor p.f. > 0.95

## Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 50 TL	24W	WW27K	CRI80	24°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Go Pro 50 TL	24W	2204	95	2700K	WW27K	24°(SS)	White SWH	Non Dimmable On/Off
		2274	98	3000K	WW30K	32°(MD)	Black SBL	Phase Dimmable PDIM
		2390	103	4000K	NW40K	36°(WD)		Dali Dimmable DDIM
		2436	105	5700K	CW57K	46°(VWD)	Bluetooth Dimmable BTM	
				2700K-5700K	TW		Casambi CBTM	
					Warm to Dim W2D			
Go Pro 50 TL	24W			WW27K	CRI80	24°(SS)	SWH	On/Off

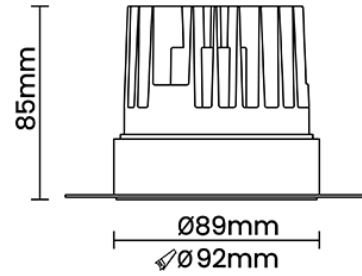

## Light Distribution

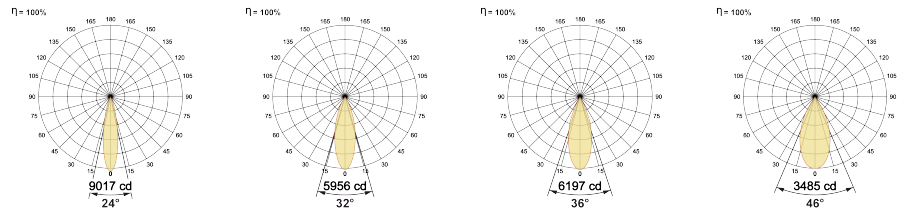

## LED Technology

Binning 3 Step MacAdam  
LED Life Time @ L80/B10 >50000 hours  
Colour Rendering (CRI) CRI80,CRI90  
Led Type COB  
LED Fitted CREE COB LED 36Vdc/600mA

## Controls

Standard Switchable On/Off  
Optional PDIM,DDIM,BTDM,CASAMBI,Non Dimmable