

Go Pro 50 P | 15W

Product Reference

Environment Indoor
Installation Ceiling Suspended

Construction & Materials

Housing Die Cast Aluminium
Primary Lens PMMA
Primary Reflector -
Secondary Reflector Anodised
Body Finish White,Black,Custom
Diffuser -
Antiglare Baffle -

Thermal Management


Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System


Beam Direction Fixed
Tilt No
Swivel No

Electrical System

Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Integral
LED Power Watts 12.4W
System Power Watts 14.2W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

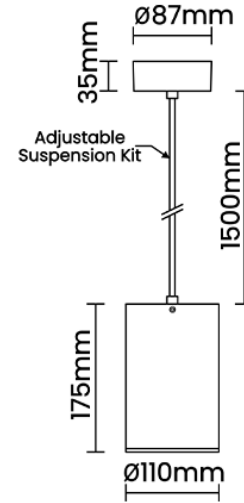

Light Distribution

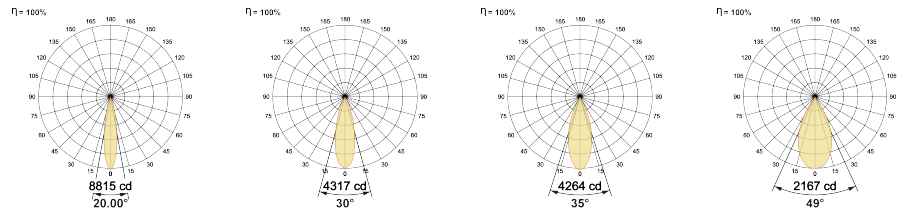

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L80/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off
Optional Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 50 P	15W	WW27K	CRI80	20°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Go Pro 50 P	15W	1392	98	2700K	WW27K	CRI80	White	Non Dimmable On/Off
		1434	101	3000K	WW30K	CRI90	Black	
		1505	106	4000K	NW40K		Custom	
		1534	108	5700K	CW57K			
Go Pro 50 P	15W			WW27K	CRI80	20°(SS)	SWH	On/Off

