

# AllRounder | 8W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens -

Primary Reflector White Optics

Secondary Reflector -

Body Finish White

Diffuser Premium high-transmission opal

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 6.4WZZ


System Power Watts 7.4WZZ

Operating Voltage Vin 220-240 VacZZ

Power Factor p.f. > 0.95ZZ

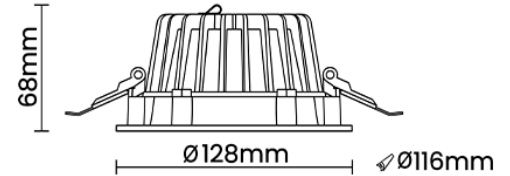

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-38Vdc/190mA ZZ

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	AllRounder	8W	WW27K	CRI80	83°ZZ	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH	CONTROL	
AllRounder	8W	881	119	2700K	WW27K	CRI80	83°ZZ ZZ	White SWH	Non Dimmable	On/Off
		910	123	3000K	WW30K	CRI90	Phase Dimmable		PDIM	
		962	130	4000K	NW40K	Dali Dimmable	DDIM			
		999ZZ	135ZZ	5700K	CW57K	Bluetooth Dimmable	BTTM			
				2700K-5700KZZ	TWZZ	Casambi	CBTM			
AllRounder	8W			WW27K		CRI80	83°ZZ	SWH	On/Off	