

# Henri | 8W

## Product Reference

Environment Outdoor

Installation Floor Surface

## Construction & Materials

Housing Die Cast Aluminium, Extruded Aluminium

Primary Lens Polycarbonate

Primary Reflector -

Secondary Reflector -

Body Finish Black, Grey

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 7.6W


System Power Watts 8.7W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

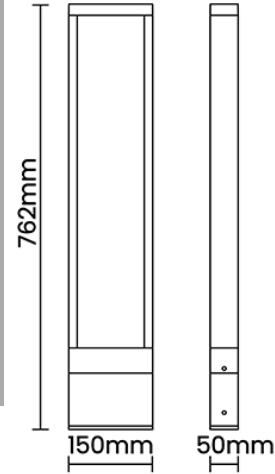

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-36Vdc/200mA

## Controls

Standard Switchable On/Off

Optional Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Henri	8W	WW27K	CRI80	85°	SBL	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Henri	8W	548	63	2700K	WW27K	85°	Black	Non Dimmable
		566	65	3000K	WW30K		Grey	
		592	68	4000K	NW40K		GGT	
		609	70	5700K	CW57K			
Henri	8W			WW27K	CRI80	85°	SBL	On/Off

