

Linea Magic 48V 90 | 12.6W

Product Reference

Environment Indoor

Installation Track Mounted

Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish Black

Diffuser Premium high-transmission opal

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz 48V

Control Gear Included



Mounting Remote

LED Power Watts 12.4W


System Power Watts -

Operating Voltage Vin 48V

Power Factor p.f. -

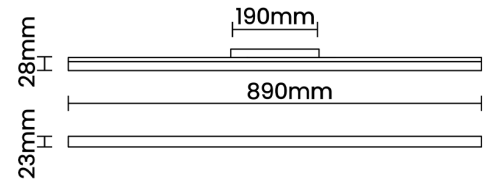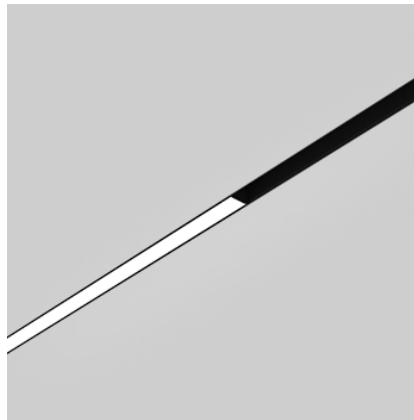

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 33V-36Vdc/350mA

Controls

Standard Switchable On/Off

Optional DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Linea Magic 48V 90	12.6W	WW27K	CRI90	112°	SBL	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH	CONTROL		
Linea Magic 48V 90	12.6W	942	76	2700K	WW27K	CRI90	112°	Black	SBL	Non Dimmable	On/Off
		967	78	3000K	WW30K					Dali Dimmable	DDIM
		1017	82	4000K	NW40K					Bluetooth Dimmable	BTTM
		1042	84	5700K	CW57K					Casambi	CBTM
				2700K-5700K	TW						
Linea Magic 48V 90	12.6W			WW27K		CRI90	112°	SBL	On/Off		

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

frontdesk@abbylighting.com, +91 9833645212

www.abbylighting.com