

Spot on Framer SR 45 | 9W

Product Reference

Environment Indoor

Installation Semi Recess

Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 7.4W



System Power Watts 8.5W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

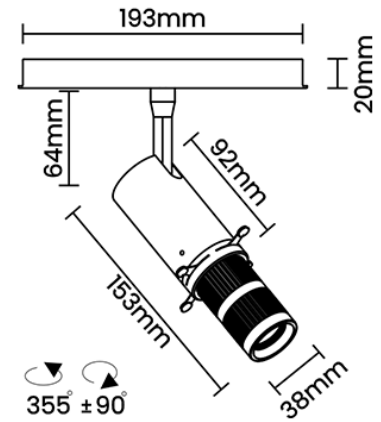

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 36Vdc/200mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|-----------------------------|-----------|--------------|--------------|----------------|------------|---------------|
| | Spot on Framer SR 45 | 9W | WW27K | CRI80 | 22°-31° | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | | CRI | ANGLE | FINISH | | CONTROL | |
|-----------------------------|-----------|-------|----------|--------------|--------------|--------------|----------------|------------|------------|----------------|---------------|
| Spot on Framer SR 45 | 9W | 468 | 55 | 2700K | WW27K | CRI80 | 22°-31° | White | SWH | Non Dimmable | On/Off |
| | | 485 | 57 | 3000K | WW30K | CRI90 | | Black | SBL | Phase Dimmable | PDIM |
| | | 510 | 60 | 4000K | NW40K | | | | | Dali Dimmable | DDIM |
| | | 519 | 61 | 5700K | CW57K | | | | | | |
| Spot on Framer SR 45 | 9W | | | WW27K | | CRI80 | 22°-31° | SWH | | On/Off | |