

# Spot on Framer SR 55 | 14W

## Product Reference

Environment Indoor  
Installation Semi Recess

## Construction & Materials

Housing Aluminium  
Primary Lens PMMA  
Primary Reflector -  
Secondary Reflector -  
Body Finish White,Black  
Diffuser -  
Antiglare Baffle -

## Thermal Management

Heat Sink Material Aluminium  
Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable  
Tilt Yes  
Swivel Yes

## Electrical System


Driven with Constant Current Driver  
Input Voltage/Hz 220V- 240V/50-60Hz  
Control Gear Included  
Mounting Remote  
LED Power Watts 12.2W  
System Power Watts 14.0W  
Operating Voltage Vin 220-240 Vac  
Power Factor p.f. > 0.95

## Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Spot on Framer SR 55</b>	<b>14W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>22°-29°</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
<b>Spot on Framer SR 55</b>	<b>14W</b>	392	28	2700K	<b>WW27K</b>	<b>22°-29°</b>	White	Non Dimmable
		406	29	3000K	<b>WW30K</b>		Black	Phase Dimmable
		434	31	4000K	<b>NW40K</b>			Dali Dimmable
		448	32	5700K	<b>CW57K</b>			
<b>Spot on Framer SR 55</b>	<b>14W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>22°-29°</b>	<b>SWH</b>	<b>On/Off</b>

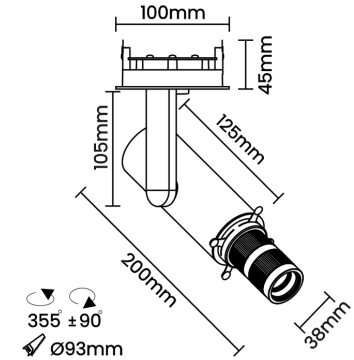

## Light Distribution

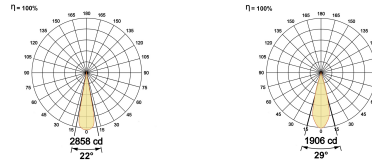

## LED Technology

Binning 3 Step MacAdam  
LED Life Time @ L80/B10 >50000 hours  
Colour Rendering (CRI) CRI80,CRI90  
Led Type COB  
LED Fitted Cree COB LED 36Vdc/350mA

## Controls

Standard Switchable On/Off  
Optional PDIM,DDIM,Non Dimmable

